


Single Row Tapered Roller Bearing

32200 Series-32215J2/Q

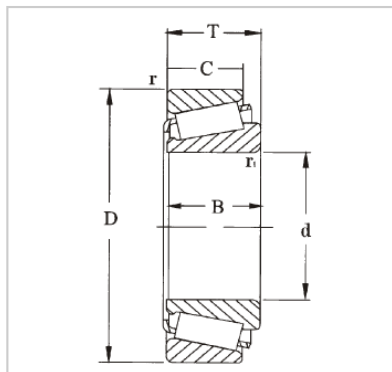

WUXI GUANGQIANG BEARING TRADE CO.,LTD

تعيين	32215J2/Q
الأبعاد الرئيسية (مم)	
د 1	75
	130
	33.25
تصنيفات الحمل الأساسية (KN)	
DYC (كر)	161
stc (كور)	212
يو	24.5
تقييمات السرعة (rpm)	
تقييمات السرعة	3600
تحديد السرعة	5000
الوزن (كجم)	1.70
ISO335	
الأبعاد (ABMA)	4DC
الأبعاد □مم	
	75
□ د 1	100
	31
	27
r1,2 (دقيقة)	2
r3,4 (دقيقة)	1.5
	29
أبعاد الدعامات والشرائح □مم	
دا (كحد أقصى)	85
ديسبيل (دقيقة)	84
دا (دقيقة)	114
دا (حد أقصى)	122
ديسبيل (دقيقة)	125
كاليفورنيا (دقيقة)	4
Cb (دقيقة)	6
ra (أقصى حد)	2
rb (أقصى حد)	1.5
قيمة	
	0.43
	1.4
يو	0.8

GQZ high quality 32200 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered

roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com